

IF IT WORX, IT'S



# THE INDIVIDUAL COLOUR MATCHING

WORKS PERFECTLY: GLARING RED  
IS NOW A RELAXING PINK.



DIGITAL  MULTIFUNCTIONAL COLOUR SYSTEM

CDC 1930/1935



DIGITAL MULTIFUNCTIONAL COLOUR SYSTEM CDC 1930/1935

# BRIGHTEN UP YOUR DAY WITH A LITTLE BIT OF COLOUR.




LIFE IS CHANGING, ARE YOU READY? WITH OUR CDC 1930 AND CDC 1935 DIGITAL A3 COLOUR MULTIFUNCTIONAL SYSTEMS, EVERYTHING JUST GOT EASIER, FASTER AND MORE FLEXIBLE – IT DOESN'T MATTER IF YOU'RE PRINTING, COPYING, SCANNING OR FAXING\*.

Both units are optimised for entry to mid-level colour volume office environments and are reliable systems that will help you get through your tasks especially on a hectic day. Brilliant colours, that can be adjusted via user-defined settings, make dreary presentations, handouts and booklets a thing of the past. With dual scan\*, both sides of a document are scanned in a single pass using separate scanners. And whilst on the subject of double-sided, a special mention should be made of the duplex unit. This double-sided printing feature can save you

reams of paper. Worried about completing a large print job? Not a problem as you can produce booklets\*, flyers, etc. in large quantities and with impressive results. You can even do your own finishing\*, such as tri-fold and offline stapling, at the touch of a button and with impeccable results. With a maximum paper capacity of up to 7,150 sheets\*, there are endless possibilities for you to take on any task with speed and flexibility, and talking of speed: The CDC 1930 has a first copy time of 6.2/8.1 seconds (b/w or colour); the CDC 1935 5.8/7.4 seconds. If required, paper weights up to 300 g/m<sup>2</sup> and paper formats up to A3+ (305 x 457 mm) can be easily handled. Given the advanced technology used, you would be forgiven for thinking operation would be difficult – no, it's easy: The clearly laid out touch panel and a user-friendly printer driver allow you instant and easy access to all the functions. *\*option*

DIGITAL   
MULTIFUNCTIONAL COLOUR SYSTEM  
**CDC 1930/1935**

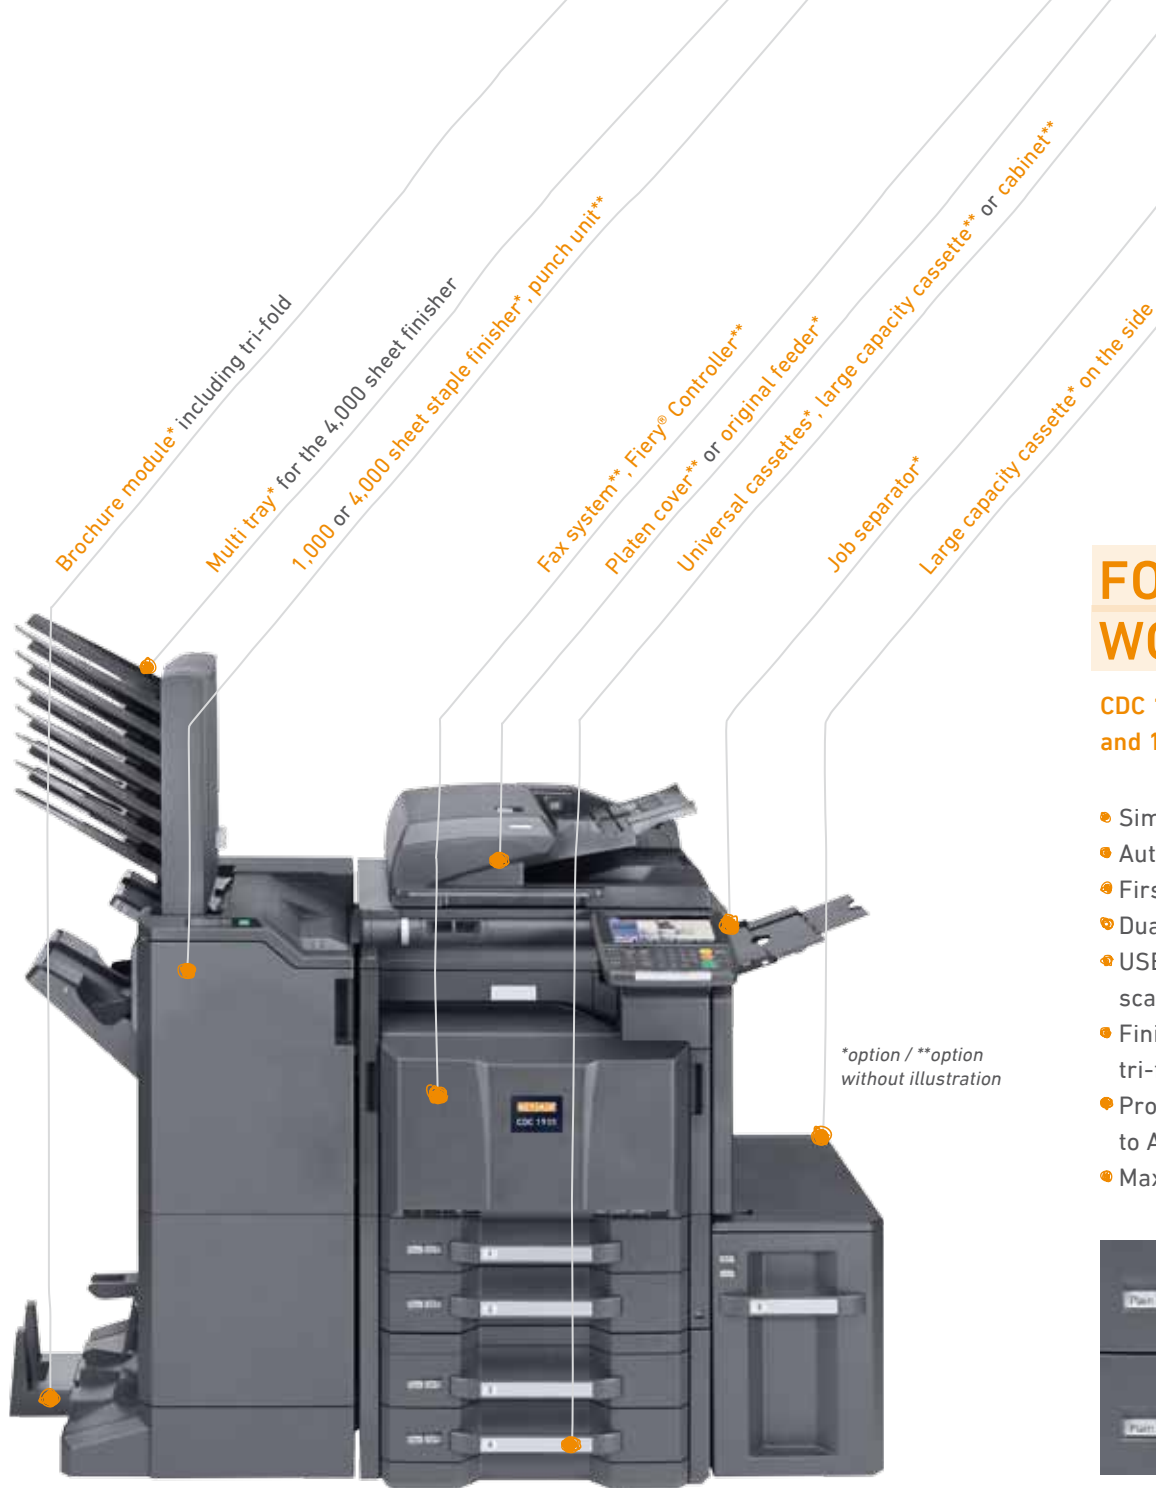

## FOR A COMPLETELY EFFICIENT WORKFLOW:

CDC 1930/1935 with 2 x 500 sheet universal cassettes, duplex unit and 160 GB hard disk

- Simple controls on a large and clearly laid out touch screen
- Authentication for control of user authorisation
- First colour copy in 8.1/7.4 seconds (CDC 1930/CD 1935)
- Dual Scan\* scans both sides of the page in a single pass
- USB host for direct print function from USB flash drives and scanning to USB
- Finishing\* of stapled/hole-punched documents and booklets, tri-folded letters\*, offline stapling
- Processing of heavy paper weights up to 300 g/m<sup>2</sup> and formats up to A3+ (305 x 457 mm)
- Maximum paper capacity of 7,150 sheets



DIGITAL   
 MULTIFUNCTIONAL COLOUR SYSTEM  
**CDC 1930/1935**

IF IT WORX, IT'S



**GENERAL**

Type	Desktop
Function	Copy, print, scan, optional: fax
Print technology	Laser colour and b/w
Original format	max A3 from platen glass
Copy/print speed	CDC 1930: max 30 A4 pages/min and max 15 A3 pages/min in colour and b/w, CDC 1935: max 35 A4 pages/min and max 17 A3 pages/min in colour and b/w
1st page (Copy/Print)	Colour: 8.1/9.5 seconds*, b/w: 6.2/7.3 seconds* (CDC 1930)
Warm-up time	25 seconds
Copy resolution	600 x 600 dpi, 9,600 x 600 dpi level
Greyscales	256
Paper feed	2 x 500 sheet universal cassettes (A5R-A3+ [max 305 x 457 mm]), 150 sheet multi-bypass (A6R-A3+, Banner [305 x 1,219 mm])
Paper weights	Universal cassette 60-220 g/m <sup>2</sup> , multi-bypass 60-300 g/m <sup>2</sup> , duplex 60-256 g/m <sup>2</sup>
Paper output	250 sheet A4
System memory	2,048 MB RAM, 160 GB HDD**
Continuous copying	1-999 copies
Zoom	25 %-400 % in steps of 1 %
Functions	Adjustable touch screen, duplex, 1,000 management codes, multi tasking controller, direct printing from USB stick, colour optimizer for printing, etc.

**DIMENSIONS/WEIGHT**

Dimensions	747 x 668 x 767 mm (H x W x D)
Weight	approx. 114 kg

**ENVIRONMENT**

Mains voltage	220/240 V, 50/60 Hz
Power consumption	approx. 2,400 max, approx. 900 W (CDC 1930)/910 W (CDC 1935) in operation, approx. 200 W in stand-by mode, approx. 17 W in sleep mode
Safety	GS/TÜV, CE

Your UTAX dealer

**PRINT SYSTEM**

Type	Integrated within the system
Print format	A6R-A3+
Print resolution	600 x 600 dpi, 9,600 x 600 dpi level
Processor	PowerPC 750CL/600 MHz
Interfaces	USB 2.0, 10/100/1000BaseTX, USB host, CF slot
Network protocols	TCP/IP, IPX/SPX, Net BEUI, EtherTalk
Operating systems	Windows XP, Vista, Windows 7, Server 2003/2008 R2, Novell NetWare, Linux, Mac ex OS 10.4
Emulations	PCL6, KPD L 3 (PostScript 3 compatible), XPS, PRESCRIBE IIc
Functions	PDF/XPS direct printing, printing of e-mails, private printing, barcode printing

**SCAN SYSTEM**

Scan type	CCD colour and b/w
Scan format	max A3
Scan speed	b/w: max 70/100 A4 originals/min (simplex/duplex), colour: max 70/80 A4 originals/min (simplex/duplex) with DP-771
Scan resolution	200 dpi, 300 dpi, 400 dpi, 600 dpi
Scan mode	Photo, text, photo/text, OCR
File types	TIFF, PDF, JPEG, XPS
Interface	10/100/1000BaseTX
Network protocol	TCP/IP
Operating systems	Windows XP, Vista, Windows 7, Server 2003/2008 R2
Functions	Scan to SMB, scan to e-mail, scan to FTP, scan to USB, TWAIN scan (Windows XP, Vista, Windows 7, Server 2003/2008), WIA scan (Windows Vista, Windows 7, Server 2008), SMTP authentication, LDAP, PDF compression and encryption

**OPTIONAL FAX SYSTEM (V)**

Compatibility	Super G3
Original format	max A3
Modem speed	33.6 kbps
Transmission speed	3 seconds or less using JBIG
Compression method	JBIG, MMR, MR, MH
Fax resolution	Standard (200 x 100 dpi), fine (200 x 200 dpi), super fine (200 x 400 dpi), ultra fine (400 x 400 dpi), 600 x 600 dpi
Fax memory	12 MB (max. 120 MB)
Abbreviated dial	2,000 numbers
One touch dial	100 numbers
Group dial	500 numbers
Operating systems	Windows XP, Vista, Windows 7, Server 2003/2008 R2
Functions	Network fax driver, automatic redialling, delayed transmission, max 2 fax kits for parallel transmission and reception

**OPTIONS**

Original feeder	DP-770 document processor with automatic reverse function (A5R-A3, capacity: 100 sheet A4, paper weight 45-160 g/m <sup>2</sup> ), DP-771 document processor with simultaneous duplex scanning (A5R-A3, capacity: 175 sheet A4, paper weight 35-220 g/m <sup>2</sup> )
Platen cover Finisher	Platen cover type E (if document processor is not installed) DF-770 (capacity: 1,000 sheet A4, stapling max 50 sheet A4), DF-790 (capacity: 4,000 sheet A4, stapling max 65 sheet A4), PH-7C hole punch unit for DF-770/790, BF-730 brochure module for DF-790 (max 16 sheet saddle stitching and folding A4/A3, tri-folding max 5 sheet A4), MT-730 multi tray for DF-790
Job Separator Paper feed	JS-730 (inner), JS-731 (outer) PF-730 (2 x 500 sheet universal cassettes [A5R-A3+]), PF-740 (3,000 sheet large capacity cassette [A4]), PF-770 (3,000 sheet large capacity tray [A4], side deck)
Other options	Data security kit (E), Internet fax kit (A), Printed document guard kit (A), Card authentication kit (B), UG-33 ThinPrint® kit, UG-34 Emulation option kit, IB-50 Gigabit Ethernet card, DT-730 Document tray, cabinet no. 63, Fiery® Controller

\*Depending on operating status.

\*\*For copy, print, scan, fax.

Specifications subject to change without notice. Image shows machine with optional accessories. The CDC 1930 and the CDC 1935 are manufactured in accordance with the requirements of the Energy Star Program.

Since 1961 UTAX GmbH has been a brand for professional office technology. As a partner to retailers and medium-sized companies, we specialise in sales and integration of printing, copying and multifunctional systems in business IT. When advising our customers, we always strive to support their strategic business objectives with UTAX solutions. In addition to hardware, UTAX also develops customised software for efficient document management.

UTAX GmbH Norderstedt  
 www.utax.com



**HyPAS™**

UTAX recommends the use of original UTAX accessories for trouble-free operation of your system. For recommended print media refer to the user manual. UTAX and the UTAX logo are registered trademarks of UTAX GmbH. All other brand names referred to are registered trademarks of the respective manufacturers.